



StudioHub+ Solutions for Current Satellite Receivers

NOTE – these manufacturers have standardized pin-outs based on the legacy StarGuide models. Note that all Dongles will not work with all receiver models based on outputs provided.

Partial users list - Clear Channel / Cumulus / Moody / Westwood One / Radio America / Skyview

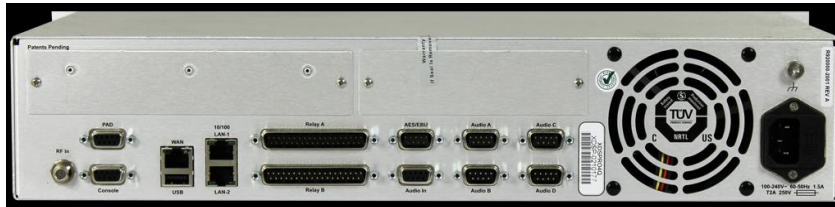

XDS PRO-1 / PRO-1Q / PRO-4 / PRO4P / PRO-4Q



Wegener Ipump 6420



MAX / International Datacasting (IDC) / Westwood One

AUDIO "DONGLE" ADAPTERS

XDS-PRO & MAX (IDC) Satellite "Dongle" - D to RJ-45 Adapters					
Receiver model	Configuration	Part #	Type	Connectors	Style
XDS PRO - all models MAX (IDC) - all models (use up to 4 Dongles for the PRO-4 models) (also pinned with Starguide III)	Analog Stereo Out	12611	AN	1 DB9(f) to 1 RJ-45	A
	Digital Stereo Out	12672	CG	1 DB9(f) to 1 RJ-45	A
	Dual Mono Out	12627	AV	1 DB9(f) to 2 RJ-45	B
	Dual Stereo Out	12857	CD	1 DB9(f) to 2 RJ-45	B
	Analog & Digital Stereo Out	12999	AO	1 DB9(f) to 1 RJ-45	A
"Q" models only	Analog Stereo In	19054	CV	1 DB9(m) to 1 RJ-45	A
	Analog & Digital Stereo In	17150	WW	1 DB9(m) to 2 RJ-45	B
	Digital Stereo Out (4 Ch's)	19055	CW	1 DB9(f) to 4 RJ-45	C



Style A



Style B



Style C



Style D




Style E

REMOTE CONTROL – 66B Block Break-Out



Part # – DB37MRJ21-008
DB-37MALE to RJ-21 MALE Cable
(note – specify length in suffix)

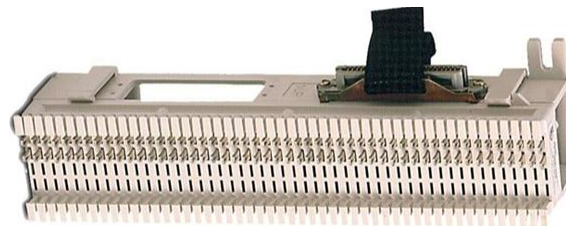

Part # – 11616
66B Block with integrated RJ-21 FEMALE Connector