


P/N 19254

Configuration: DB 9 Female to QUAD RJ-45

Type EG

Application: Comstream ABR-700 Satellite Receiver Analog Out (two parallel stereo outputs)

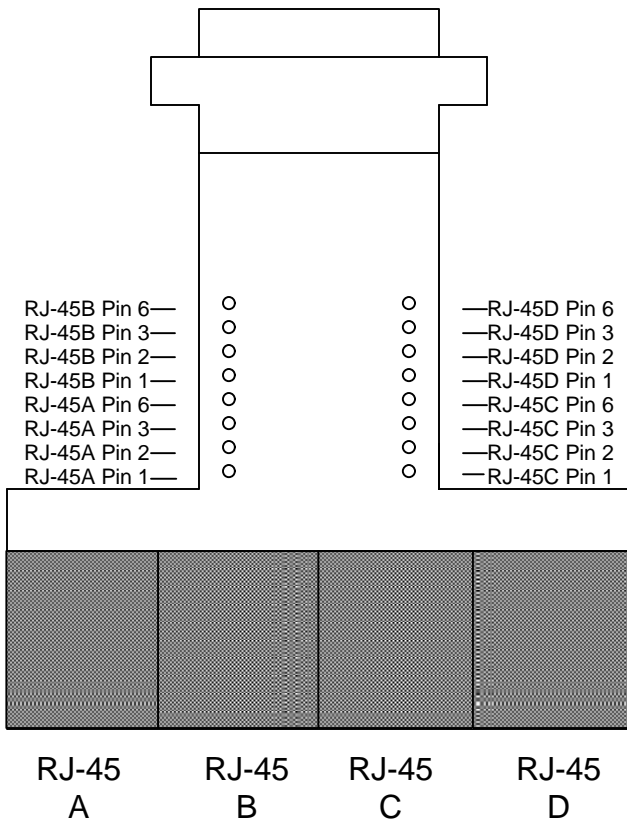

<u>DB-9</u>	<u>RJ-45</u>	<u>Function</u>
pin1	→ A/pin1	left +
pin2	→ A/pin2	left -
pin1	→ B/pin1	left +
pin2	→ B/pin2	left -
pin4	→ C/pin1	right +
pin5	→ C/pin2	right -
pin4	→ D/pin1	right +
pin5	→ D/pin2	right -
#6/9	→ All Shields	GND

Hub Pin Outs

<u>Channel</u>	<u>Color Pair</u>	<u>RJ-45 Pin</u>	<u>110 Pin</u>
L+ / AES +	Wht/Org	1	3
L- / AES -	Org/Wht	2	4
R+	Wht/Grn	3	5
R-	Grn/Wht	6	6
nc	Wht/Blu	5	1
GND	Blu/Wht	4	2
15V-	Wht/Brn	7	7
15V+	Brn/Wht	8	8
Shield	Wht/Slit	Shield	9
Shield	Slit/Wht	Shield	10



The Studio Wiring Solution from

radio
SYSTEMS

601 Heron Drive · Logan Township, NJ 08085
856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com