

For Assy:
 16494
 16498
 Rev: 10/4/2006

Radio Systems

8 Channel AES/Analog Switcher Board

Description

The eight channel switcher board is an option card available for installation and use in any Radio Systems Millennium Analog or Digital console.

The card mounts in the option card area on the inside back-wall of the console. Multiple cards may be installed and utilized for up to three channels of 8x2 stereo switching.

J1-J5 D-Connector Audio Input/Output


1. Audio In +
2. Audio In -
3. Audio Out +
4. Audio Out -
5. GND
6. GND
7. +15v
8. n/c
9. n/c

J6 Power Connector

1. +15v
2. GND
3. -15v

Level Sets

IN-1	Talkback 1	Level	Input	Set
IN-2	Talkback 2	Level	Input	Set
IN-3	Talkback 3	Level	Input	Set
IN-4	Talkback 4	Level	Input	Set
IN-5	Talkback 5	Level	Input	Set
IN-6	Talkback 6	Level	Input	Set

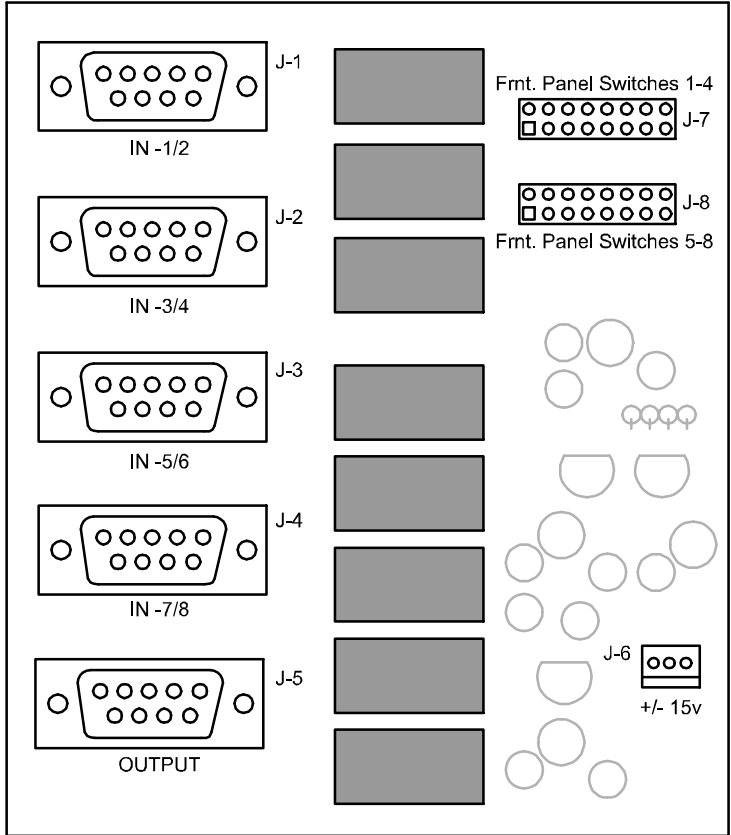

D-Connector Version Shown

Connectivity

- Power jumper (J-6) from any console available auxiliary power connector
- Input connectors (J-1 thru J-5) connect to any analog or AES/EBU digital signal
- Output connectors (J-6) is wired internally in the console to any analog or AES/EBU input channel
- Switch connectors J-7 & J-8 wires internally in the console to the monitor panel 8-selector D connectors or to the upper 6 channel control board in any RS "Switcher" equipped console model.

Available Versions

- RS Part #16494 - D-Connector Version (Shown)
- RS Part #16498 - RJ-45 Version (Not Shown)



601 Heron Drive · Logan Township, NJ 08085
 856/467-8000 · 856/467-3044 Fax · sales@radiosystems.com
www.radiosystems.com · www.studiohub.com