


Technical Bulletin
No: 120 – Power Supply Conversion
from 120V AC to 120/240V AC


RS

Power Supply Conversion:

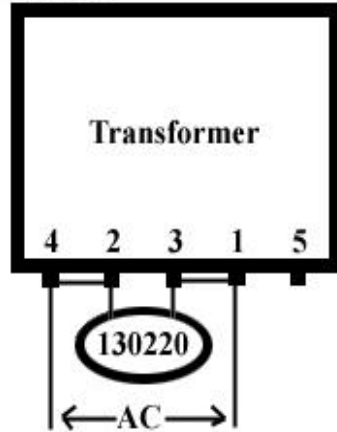

For 230/240 AC 50/60 Hz:

* Replace MOV
with P/N 8042
V250La20A

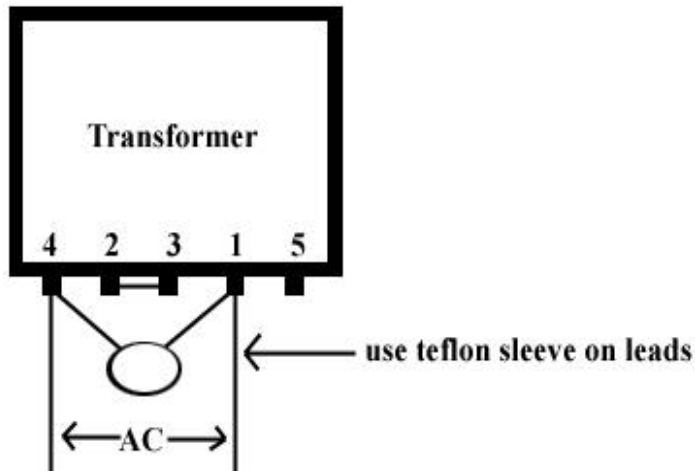

- If connecting a heavy duty (18 channel) supply, be sure to modify both supplies.
- Change fuses to 1 A SB 1/2 SB
(PS-1) (PS-2)
- Plug unit into AC outlet, check for =12V DC at collector of regulator priss transistors.
- Cut off AC plug and tin leads
- Tag Cord "230/240 VAC 50/60 Hz



601 Heron Drive
Logan Township, NJ 08085
Phone: 856-467-8000 • Fax: 856-467-3044
<http://www.radiosystems.com>